


Maße Flansch-Kugelhahn Serie FG Dimensions flanged ball valve series FG DN 65 - DN 100

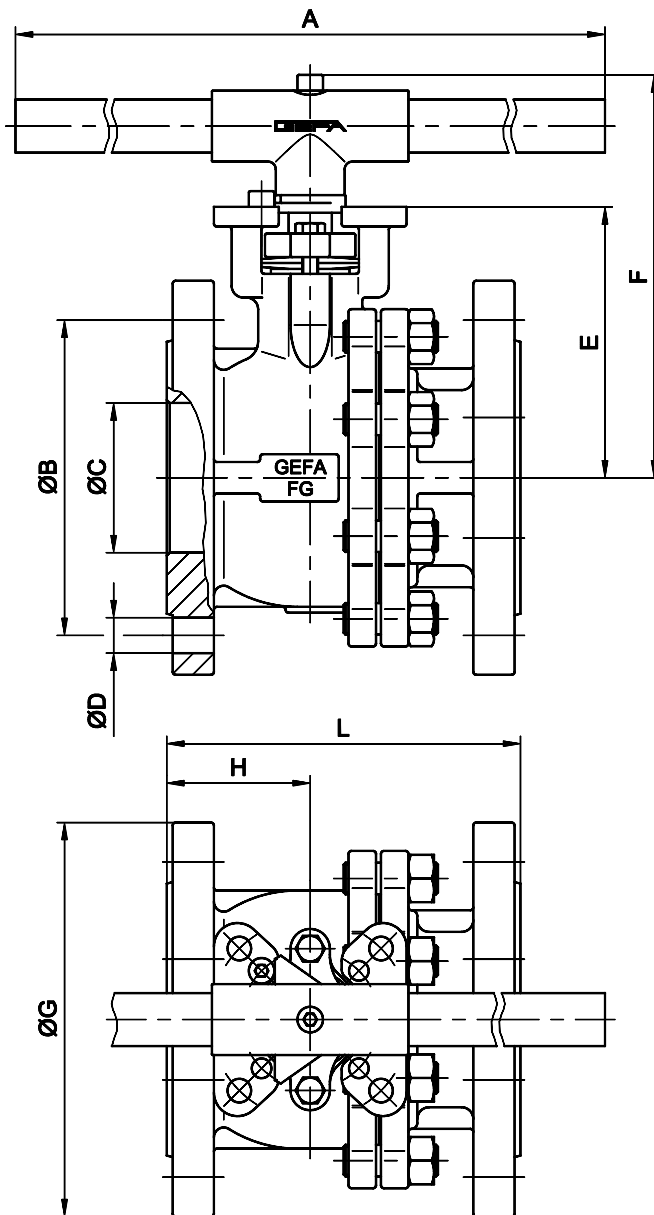

MULTITOP
Antriebsanschluss:
 DIN 3337 / ISO 5211

Baulänge:
 DIN 3202-F4
 EN 558-1-Reihe 27

Flansche:
 DIN 2501 - PN 16 / PN 40

MULTITOP
Mounting plate:
 DIN 3337 / ISO 5211

**Face to face
dimension:**
 DIN 3202-F4
 EN 558-1-line 27

Flanges:
 DIN 2501 - PN 16 / PN 40

DN	NPS	PN	A	ØB	ØC	ØD	E	F*	ØG	H	L	kg
65	2 1/2"	16	400	145	64	4x18	131	198	185	71	170	14
80	3"		400	160	76	8x18	138	205	200	73	180	19
100	4"		500	180	100	8x18	155	222	220	83	190	24
65	2 1/2"	40	400	145	64	8x18	131	198	185	71	170	14
80	3"		400	160	76	8x18	138	205	200	73	180	19
100	4"		500	190	100	8x22	155	222	235	83	190	28

Gewicht inklusive Handhebel / Weight including hand lever

* Option: um 100 mm verlängert für Isolierbauhöhe
 length increased by 100 mm for insulation